



**imageRUNNER ADVANCE DX C3700 Series**

# CONNECT SECURELY, TRANSFORM DIGITALLY

INNOVATIVE SCAN TECHNOLOGY AND SMART SOFTWARE WORK HAND-IN-HAND

The future of business is digital. Canon imageRUNNER ADVANCE DX is a new generation of smart multifunction devices, designed to support and accelerate every step of your digital transformation. Built with Canon's imageRUNNER ADVANCE DNA, state-of-the-art technology and software work hand-in-hand to digitise, automate and optimise content-centric workflows.

Canon's imageRUNNER ADVANCE DX C3700 series offers smart and secure A3 colour multifunction devices that deliver smaller print and scan volumes in every department of your business, without compromising on security. New scanning technology ensures high-speed and pinpoint accuracy, while uniFLOW Online Express - which comes as standard - delivers cloud connectivity and basic print management.



**CLOUD  
CONNECTIVITY**



**SECURITY**  **McAfee  
PROTECTED**



**PRODUCTIVITY**



**SUSTAINABILITY**



**Canon**

# imageRUNNER ADVANCE DX C3700 Series

## CLOUD CONNECTIVITY

- Scan and print documents from any location with enhanced cloud connectivity, offered with re-usable print formats for ease of use
- Cloud-based software-as-standard uniFLOW Online Express offers a single integrated solution to enhance device security and simplify print management
- Canon's MEAP platform optimises processes by integrating with document capture and output management solutions and various applications such as uniFLOW Online\*, AirPrint, Mopria, Google Cloud Print and Canon PRINT Business

## SECURITY

- Ensure information confidentiality and security across the network with IPsec and firewall functionality
- Set up device authentication, two-factor authentication and device function restrictions for both device and cloud-based security measures
- Encrypted PDF scanning ensures document security during scanning process
- Upgrade to uniFLOW Online\* for enhanced secure printing, mobile printing, and guest printing from any device
- Combination of Verify system at start up and McAfee Embedded Control Software ensures device functionality is never compromised from the tampering of firmware and applications, all in real-time.

## PRODUCTIVITY

- Fast, high-quality scanning at 270 ipm (A4) with expansive connectivity options
- Automated scan, store and search workflows boost efficiency and reduce human error
- Device management tools such as iWMC provide centralised control over the device fleet and print management
- Automatic removal of blank pages when scanning minimises process times
- Reusable formats, automatic file names from barcode data, Office format conversions, cloud and device OCR with IRIS enable easy handling and fast document processing

## SUSTAINABILITY

- Edit print settings at device-level for accurate scan output
- Quiet operation and reduced paper hitting sounds during scanning is enabled thanks to technologies such as digital registration and a smooth ADF internal structure
- Automated and digitised processes minimise paper usage for a paperless office
- Reduce waste with high-quality scanning, including digital deskewing and advanced stain-resistant glass

\*uniFLOW Online is available as a Device Based Cloud Subscription for Document Output and Capture Management. Based on business needs, users can upgrade to uniFLOW Online to unlock a range of advanced benefits, including: increased security with user authentication methods. Personalised workflows to enhance productivity. Reduced wastage by releasing jobs at the device. An intuitive cloud dashboard to leverage real-time data. Greater control over access and usage to reduce print costs.

## QUICK FACTS

- **Format:** Colour A3
- **Paper Supply Capacity (Max):** 2,300 sheets
- **Warm-up time:** 4 seconds or less
- **Finishing Capabilities:** Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
- **DADF Capacity:** 150 sheets
- **Supported File Types:** PDF, EPS, TIFF, JPEG, and XPS
- **Print speed:** 20-30 ppm (A4)
- **Scan Speed:** 270 ipm (A4)
- **Print Languages:** UFRII, PCL6, Adobe® PostScript 3™
- **Print Resolution:** 1,200 x 1,200
- Enhanced cloud connectivity enables collaborative document access from anywhere with re-usable formats for easy handling
- Accurate, high-speed scanning is facilitated by Canon's innovative new paper feeding mechanism and stain-resistant glass
- Efficient workflow automation means documents are intuitively scanned, searched and stored with applications including OneDrive, SharePoint, Concur and Dropbox
- McAfee Embedded Control software alongside with other security features offer complete peace of mind and a 360° protection covering: document, network and device
- Simplified print management is enabled with centrally-managed print settings and device usage analysis, provided through native uniFLOW Online Express.
- Quiet ADF operation, low energy consumption and reduced emissions lower environmental impacts

## TAILORED SOLUTIONS TO MEET EVERY CHALLENGE

### CORE

Perform routine office operations safely and with ease, with minimum hardware, embedded software including UFOE and services offering complete device maintenance and support.



### HARDWARE



### SERVICES



### SOFTWARE

### ENHANCED

Boost performance with enhancements such as finishing options and security add-ons e.g. Data Removal Service. Choose solutions to expand cloud capabilities with uniFLOW Online including advanced scanning directly with your Google account.

### BESPOKE

Choose tailored solutions for any business need by removing print management burdens. Consult with Canon experts to manage your extensive requirements, with bespoke solutions and Managed Services options.

Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English edition  
© Canon Europa N.V., 2020

# imageRUNNER ADVANCE DX C3700 Series


## EVOLVE YOUR BUSINESS' DIGITISATION WITH AUTOMATED WORKFLOWS FROM SMART COLOUR A3 MULTIFUNCTION DEVICES



Canon uniFLOW Online  
Outstanding Cloud Output/Management Solution



### MAIN CONFIGURATION OPTIONS

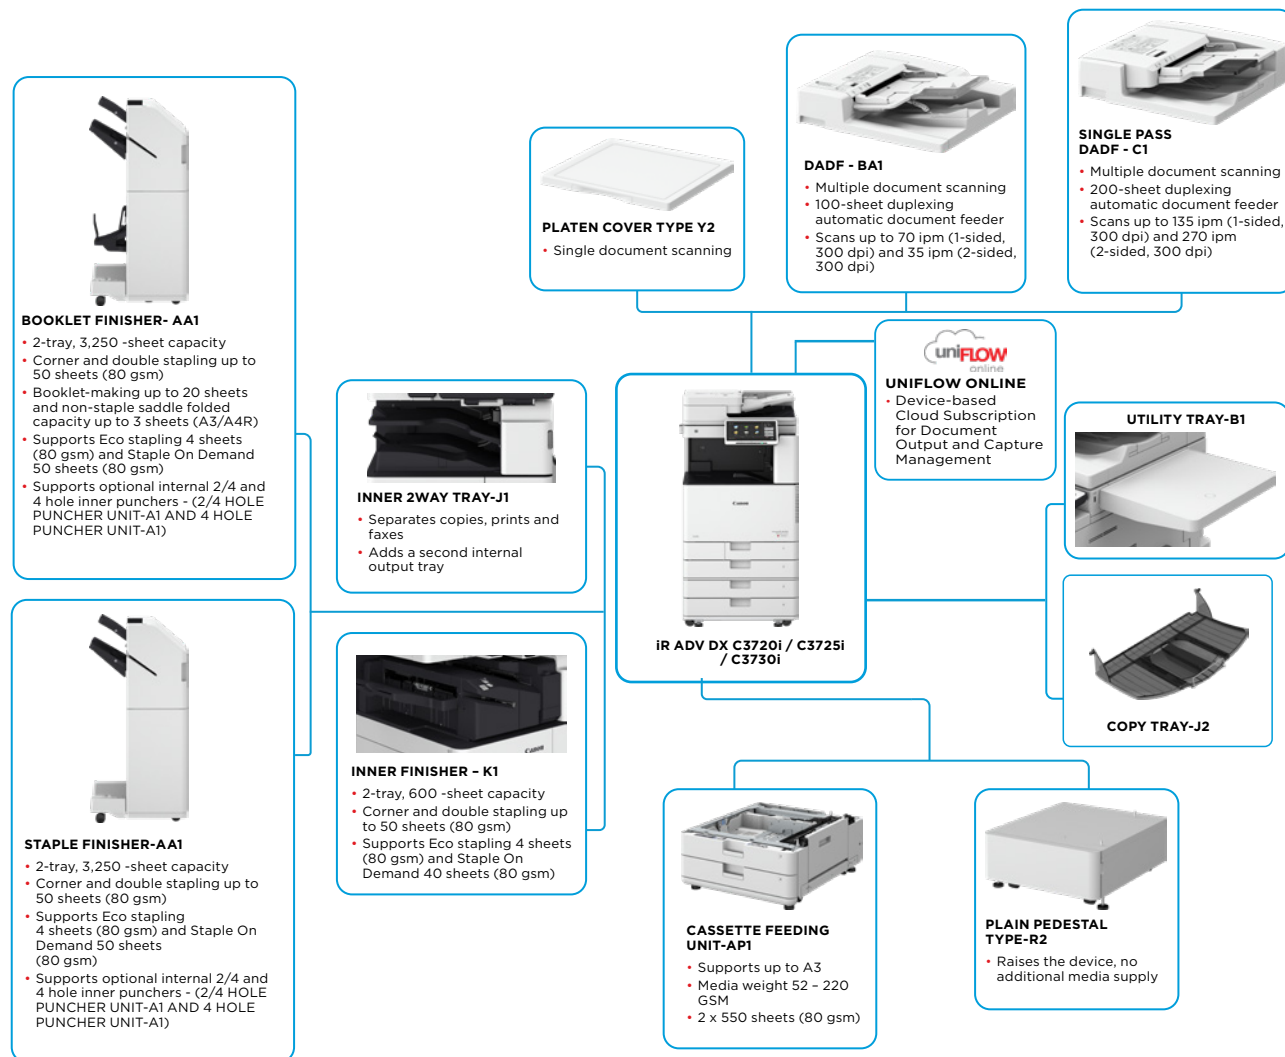

This flat configuration is for illustration purpose only. For a complete list of options and the exact compatibility relationships, please refer to the online [product configurator](#).

The Unified Firmware Platform (UFP) ensures that the latest feature upgrades and protection are available, for an enhanced user experience across the entire iR ADVANCE DX portfolio.

# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C3700 Series

## MAIN UNIT

<b>Machine type</b>	A3 Colour Laser Multifunctional
<b>Core functions</b>	Print, Copy, Scan, Send, Store and Optional Fax
<b>Processor</b>	1.75GHz Dual Core Processor
<b>Control Panel</b>	10.1" TFT LCD WSVGA Colour Touch panel
<b>Memory</b>	Standard: 3.0GB RAM
<b>Hard Disk drive</b>	Standard*: 320 GB (available disk space: 250 GB), Optional: 250GB, 1TB * A different initial HDD may be used.
<b>Interface Connection</b>	NETWORK Standard: 1000Base-T/100Base-TX/10Base-T, Wireless LAN(IEEE 802.11 b/g/n) Optional: NFC, Bluetooth Low Energy OTHERS Standard: USB 2.0(Host) x1, USB 3.0(Host) x1, USB 2.0(Device) x1 Optional: Serial Interface, Copy Control Interface
<b>Paper Supply Capacity (A4, 80gsm)</b>	Standard: 1,200 sheets 2 x 550-sheet cassettes 100-sheet multi-purpose tray Maximum: 2,300 sheets (with Cassette Feeding Unit-AP1)
<b>Paper output capacity (A4, 80gsm)</b>	Standard: 250 sheets Maximum: 3,450 sheets (with Staple Finisher-AA1/Booklet Finisher-AA1 and Copy Tray-J2)
<b>Finishing capabilities</b>	With options: Collate, Group, Offset, Staple, Saddle Stitch, Hole Punch, Eco Staple, Staple On Demand
<b>Supported media types</b>	Multi-purpose tray: Thin, Plain, Heavy*, Recycled, Coated*, Colour, Tracing, Bond, Transparency, Label, Pre-punched, Envelope * SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper. Paper Cassettes (Upper): Thin, Plain, Heavy*, Recycled, Coated*, Colour, Tracing, Bond, Transparency, Pre-punched, Envelope * SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper. Paper Cassettes (Lower): Thin, Plain, Heavy, Recycled, Color, Bond, Transparency, Pre-punched, Envelope* * Envelope Feeder Attachment A is required.
<b>Supported media sizes</b>	Multi-purpose tray: Standard size: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Free size: 98.4 x 139.7 mm to 320.0 x 457.2 mm Envelopes: COM10 No.10, Monarch, DL, ISO-C5 Envelope custom size: 98.0 x 98.0 mm to 320.0 x 457.2 mm Upper Cassette: Standard size: A4, A5, A5R, A6R, B5 Custom Size: 105.0 x 148.0 mm to 297.0 x 215.9 mm Envelopes: ISO-C5 Lower Cassette: Standard size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R Custom Size: 105.0 x 148.0 mm to 304.8 x 457.2 mm Envelopes*: COM10 No.10, Monarch, DL * Envelope Attachment A (standard) is required.
<b>Supported media weights</b>	Multi-purpose tray: 52 to 300 gsm* *SRA3 is unsupported for Coated (257-300gsm) and Heavy (257-300gsm) paper. Paper Cassettes (Upper/Lower): 52 to 220 gsm Duplex: 52 to 220 gsm
<b>Warm-up Time</b>	Quick startup mode: 4 seconds or less* *Time from device power-on to when the copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 Seconds or Less From Power On: 10 seconds or less* *Time from device power-on, until copy ready (not print reservation)
<b>Dimensions (W x D x H)</b>	With Platen Cover-Y2: 565 x 692 x 777 mm With Single Pass DADF-C1: 565 x 722 x 887 mm (TBD) With DADF-BA1: 565 x 719 x 880 mm
<b>Installation Space(W x D)</b>	Basic: 978 x 1,118 mm (with Single Pass DADF-C1 + right cover open + Multi-purpose tray extension extended + paper cassette open) 978 x 1,115 mm (with DADF-BA1 + right cover open + Multi-purpose tray extension extended + Paper cassette open) Fully Configured: 1,651 x 1,118 mm with Single Pass DADF-C1 + Booklet Finisher-AA1/Staple Finisher-AA1 + Copy Tray-J2 extension extended + paper cassette open 1,651 x 1,115 mm (with DADF-BA1 + Booklet Finisher-AA1/Staple Finisher-AA1 + Copy Tray-J2 extension extended + paper cassette open)
<b>Weight</b>	With Platen Cover-Y2: Approx. 66.7kg including toner With DADF-BA1: Approx. 73.1 kg including toner With Single Pass DADF-C1: Approx. 79.6 kg including toner
<b>PRINT SPECIFICATIONS</b>	
<b>Print Speed (BW/CL)</b>	iR-ADV DX C3730i: Up to 30 ppm (A4,A5,A5R,A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R) iR-ADV DX C3725i: Up to 25 ppm (A4,A5,A5R,A6R) , Up to 15 ppm (A3), Up to 20 ppm (A4R) iR-ADV DX C3720i: Up to 20 ppm (A4,A5,A5R,A6R) , Up to 15 ppm (A3), Up to 20 ppm (A4R)
<b>Print Resolution (dpi)</b>	600×600, 1200×1200 (half-speed)
<b>Page description languages</b>	Standard: UFR II, PCL6, Adobe® PostScript®3™
<b>Direct Print</b>	Supported file types: PDF, EPS, TIFF/JPEG and XPS
<b>Printing from mobile and cloud</b>	AirPrint, Mopria, Google Cloud Print, Canon PRINT Business, and uniFLOW Online A range of software and MEAP-based solutions are available to provide printing from mobile devices or internet-connected devices and cloud-based services depending on your requirements. Please contact your sales representative for further information

## Fonts

PS fonts: 136 Roman  
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts, Andale Mono WT  
J/K/S/T\*<sup>1</sup> (Japanese, Korean, Simplified and Traditional Chinese) , Barcode fonts\*<sup>2</sup>  
\*<sup>1</sup> Optional PCL International Font Set-A1 is required.  
\*<sup>2</sup> Optional Barcode Printing Kit-D1 is required.

## Print Features

Secured Print, Secure Watermark, Header/Footer, Page Layout, Two-sided Printing, Mixed Paper Sizes/ Orientations, Front/Back Covers, Toner Reduction, Poster Printing, Forced hold printing, Print Date, Scheduled Printing, Printing Using a Virtual Printer

## Operating System

UFR II: Windows®7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later)  
PCL: Windows®7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2/Server2016/Server2019  
PS: Windows®7/8.1/10/Server2008/Server2008 R2/ Server2012/Server2012 R2/Server2016/Server2019, Mac OS X(10.10 or later)  
PPD: Windows®7/8.1/10, Mac OS X(10.9 or later)  
McAfee Embedded Control Software  
As of July,2019.

## COPY SPECIFICATIONS

### Copy Speed (BW/CL)

iR-ADV DX C3730i:  
Up to 30 ppm (A4,A5,A5R,A6R), Up to 15 ppm (A3), Up to 20 ppm (A4R)

iR-ADV DX C3725i:  
Up to 25 ppm (A4,A5,A5R,A6R) , Up to 15 ppm (A3), Up to 20 ppm (A4R)

iR-ADV DX C3720i:  
Up to 20 ppm (A4,A5,A5R,A6R) , Up to 15 ppm (A3), Up to 20 ppm (A4R)

### First-Copy-Out Time (A4; BW/ CL)

Approx. 5.9/8.2 seconds or less

### Copy resolution (dpi)

600 x 600

### Multiple Copies

Up to 999 copies

### Copy Density

Automatic or Manual (9 Levels)

### Magnification

Variable zoom: 25% to 400% (1% Increments)  
Preset reduction/enlargement: 25%, 50%, 70%, 110% (1:1), 141%, 200%, 400%

### Copy Features

Preset R/E Ratios by Area, Two-Sided, Density Adjustment, Original Type Selection, Interrupt Mode, Book to Two Pages, Two-sided Original, Job Build, N on 1, Add Cover, Insert Sheets, Different Size Originals, Page Numbering, Copy Set Numbering, Sharpness, Erase Frame, Secure Watermark, Print Date, Gutter, Print & Check, Negative/Positive, Repeat Images, Mirror Image, Copy ID Card, Skip Blank Pages, Free Size Original, Colour Mode, Reserved copy, Copy Sample

## SCAN SPECIFICATIONS

### Type

Standard: Colour Platen  
Optional: Platen cover, Single Pass DADF-C1 or DADF-B1 2-sided to 2-sided (Automatic with DADF)\*  
\*DADF: Duplexing Automatic Document Feeder

### Document Feeder Paper Capacity (80 gsm)

Single Pass DADF-C1: up to 200 Sheets  
DADF-BA1: up to 100 Sheets

### Acceptable originals and weights

Platen: Sheet, Book, and 3-Dimensional objects  
Document Feeder media weight:

Single Pass DADF-C1\*  
1-sided scanning: 38 to 220 gsm (BW/CL)  
2-sided scanning: 38 to 220 gsm (BW/CL)  
\*An acceptable weight of A6R or smaller is 50 to 220gsm.  
DADF-BA1 :  
1-sided scanning: 38 to 128 gsm (BW), 64 to 128 gsm (CL)  
2-sided scanning: 50 to 128 gsm (BW), 64 to 128 gsm (CL)

### Supported media sizes

Platen: max. scanning size up to 297.0 x 431.8 mm  
Single Pass DADF-C1:  
A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, B6R,  
Custom size: 70.0 x 139.7 mm to 304.8 x 431.8 mm  
DADF-BA1:  
A3, A4, A4R, A5, A5R, B4, B5, B5R, B6,  
Custom size: 139.7 x 128 mm to 297.0 x 431.8 mm

### Scan Speed (ipm: BW/CL,A4)

Single Pass DADF-C1:  
1-sided Scanning: 135/135 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy)  
2-sided Scanning: 270/270 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy)

DADF-BA1:  
1-sided Scanning: 70/70 (300 x 300 dpi, send), 51/51 (600 x 600 dpi, copy)  
2-sided Scanning: 35/35 (300 x 300 dpi, send), 25.5/25.5 (600 x 600 dpi, copy)

### Scan Resolution (dpi)

Scan for Copy: 600 x 600  
Scan for Send: (Push) up to 600 x 600 (SMB/FTP/WebDAV/IFAX), (Pull) 600 x 600  
Scan for Fax: 600 x 600

### Pull Scan Specifications

Colour Network ScanGear2. For both TWAIN and WIA  
Supported OS: Windows®7/8.1/10/Server2008/Server2008 R2/Server2012/Server2012 R2/Server 2016

### Scan Method

Push Scan, Pull Scan, Scan to Box, Scan to Advanced Space, Scan to Network, Scan to USB Memory Key, Scan to Mobile device, Scan to cloud (uniFLOW Online)



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C3700 Series

## SEND SPECIFICATIONS

<b>Destination</b>	Standard: E-mail/Internet FAX (SMTP) SMB3.0 FTP WebDAV Mail Box Optional: Super G3 FAX, IP Fax
<b>Address Book</b>	LDAP (2,000)/Local (1,600)/Speed dial (200)
<b>Send resolution (dpi)</b>	Push: up to 600 x 600(SMB/FTP/WebDAV/IFAX) Pull: up to 600 x 600
<b>Communication protocol</b>	File: FTP(TCP/IP), SMB3.0 (TCP/IP), WebDAV E-mail/I-Fax: SMTP, POP3
<b>File Format</b>	Standard: TIFF, JPEG, PDF (Compact, Searchable, Apply policy, Optimize for Web, PDF/A-lb, Trace & Smooth, Encrypted, Device Signature, User Signature), XPS (Compact, Searchable, Device Signature, User Signature), Office Open XML (PowerPoint, Word)
<b>Universal Send Features</b>	Original Type Selection, Two-sided Original, Book to Two Pages, Different-size Originals, Density Adjustment, Sharpness, Copy Ratio, Erase Frame, Job Build, Sender's Name (TTI), Delayed Send, Preview, Job Done Notice, File Name, Subject/Message, Reply-to, E-mail Priority, TX Report, Original Content Orientation, Skip Blank Originals

## FAX SPECIFICATIONS

<b>Maximum Number of Connection Lines</b>	2
<b>Modem Speed</b>	Super G3: 33.6 kbps G3: 14.4 kbps
<b>Compression Method</b>	MH, MR, MMR, JBIG
<b>Resolution (dpi)</b>	400x400 (Ultra Fine), 200x400 (Super Fine), 200x200 (Fine), 200x100 (Normal)
<b>Sending and Receiving Size</b>	Sending: A3, A4, A4R, A5 <sup>1</sup> , A5R <sup>1</sup> , B4, B5 <sup>2</sup> , B5R <sup>1</sup> Receiving: A3, A4, A4R, A5R, B4, B5, B5R <sup>1</sup> Sent as A4 <sup>2</sup> Sent as B4 short
<b>FAX memory</b>	Up to 30,000 pages (2,000 jobs)
<b>Speed dials</b>	Max. 200
<b>Group dials/destinations</b>	Max. 199 dials
<b>Sequential broadcast</b>	Max. 256 addresses
<b>Memory backup</b>	Yes
<b>Fax Features</b>	Sender's Name (TTI), Selecting the Telephone Line (when sending fax), Direct Send, Delayed Send, Preview, Job Done Notice, TX Report, Interrupt Transmission, Sequential Broadcasting, Password/Subaddress Sending, Confidential Mailbox, 2 on 1 Log

## STORE SPECIFICATIONS

<b>Mail Box (Number supported)</b>	100 User Inboxes, 1 Memory RX Inbox, 50 Confidential Fax Inboxes Maximum 10,000 Pages (2,000 jobs) Stored
<b>Advanced Space</b>	Communication Protocol: SMB or WebDAV Supported Client PC: Windows® 8.1/10 Concurrent Connections (Max.): SMB:64, WebDAV:3
<b>Advanced Space available disc space</b>	Standard:16 GB (With option: max. 480GB.)
<b>Advanced Space Features</b>	Authentication for Advanced Space Log-in, Sort Function, Printing a PDF File with a Password, imageWARE Secure Audit Manager Support, Search, File Preview, Authentication Management, Open to public, URI TX, Backup/Restore

## SECURITY SPECIFICATIONS

<b>Authentication and Access Control</b>	Standard: User Authentication (Picture Login, Picture and PIN Login, Card Login, Username and Password Login, Function Level Login, Mobile Login), Department ID Authentication (Department ID and PIN Login, Function Level Login), uniFLOW Online Express (PIN Login, Picture Login, Picture and PIN Login, Card Login, Card and PIN Login, Username and Password Login, Department ID and PIN Login, Function Level Login), Access Management System (Access Control)
<b>Document Security</b>	Print Security (Secure Print, Encrypted Secure Print, Forced Hold Printing, uniFLOW Secure Print <sup>1</sup> ), Receive Data Security (Confidential Fax Inbox Forwarding Received Documents Automatically), Scan Security (Encrypted PDF, Device Signature PDF/XPS, User Signature PDF/XPS, Adobe LiveCycle® Rights Management ES2.5 Integration), BOX Security (Mail Box Password Protected, Advanced Space Access Control), Send Data Security (Setting for requesting password input per transmission, Restricted E-mail/File send functions, Confirming FAX number, Allow/Restrict Fax Driver Transmissions, Allow/Restrict Sending from History, S/MIME Support), Scan Lock (QR code), Document Tracking (Secure Watermark) <sup>1</sup> Requires uniFLOW Online / uniFLOW
<b>Network Security</b>	TLS 1.3, IPsec, IEEE802.1X authentication, SNMP V3.0, Firewall Functionality (IP/MAC Address Filtering), Dual Network Support (Wired LAN/Wireless LAN, Wired LAN/Wired LAN), Disabling Unused Functions (Enabling/Disabling Protocols/Applications, Enabling/Disabling Remote UI, Enabling/Disabling USB Interface), Communication Line Separation (G3 FAX, USB Port, Advanced Space, Scan and Send -Virus Concerns for E-mail Reception)

## Device Security

Protecting HDD Data (HDD Data Encryption (FIPS140-2 Validated), HDD Data Overwrite Erase, HDD Lock), Standard HDD Initialize, Trusted Platform Module (TPM), Job Log Conceal Function, Protecting MFD Software Integrity, Checking MFD Software Integrity (Verify System at Startup, Runtime Intrusion Detection), Comply IEEE2600.2 (Common Criteria Certification) (TBD)

Administrator Password, Digital Certificate And Key Management, Audit Log, Cooperating with External Security Audit System (Security Information and Event Management), Image Data Logging, Security Policy Setting

## Device Management and Auditing

## ENVIRONMENTAL SPECIFICATIONS

<b>Operating Environment</b>	Temperature: 10 to 30 °C Humidity: 20 to 80 % RH (Relative Humidity)
<b>Power source</b>	220-240V 50/60Hz 4A
<b>Power consumption</b>	Maximum: Approx. 1,500 W Standby: Approx. 45.1 W <sup>1</sup> Sleep mode: Approx. 0.8 W <sup>2</sup> <sup>1</sup> Reference value: measured one unit <sup>2</sup> 0.8W sleep mode is not available in all circumstances due to certain settings. Typical Electricity Consumption (TEC)** : iR-ADV DX C3730i: 0.35 kWh iR-ADV DX C3725i: 0.29 kWh iR-ADV DX C3720i: 0.25 kWh **As per USA Energy Star 3.0

## Noise levels

**Sound Power Level (LWA,m)**  
Active (1-sided)  
iR-ADV DX C3730i: 6.2 B, Kv 0.3 B  
iR-ADV DX C3725i: 6.2 B, Kv 0.3 B  
iR-ADV DX C3720i: 6.1 B, Kv 0.3 B  
  
\*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017).  
Sound Pressure (LpAm)  
Bystander's position:  
Active(BW/CL)(1-sided):  
iR-ADV DX C3730i: 48 dB<sup>\*</sup>/ 49 dB<sup>\*</sup>  
iR-ADV DX C3725i: 48 dB<sup>\*</sup>/ 48 dB<sup>\*</sup>  
iR-ADV DX C3720i: 47 dB<sup>\*</sup>/ 47 dB<sup>\*</sup>  
Standby:  
iR-ADV DX C3730i/C3725i/C3720i: 10 dB<sup>\*</sup>  
  
\*Reference value: measured only one unit with ISO7779, described with ISO9296 (2017)

## Standards

Blue Angel

## CONSUMABLES

<b>Toner Cartridges</b>	C-EXV 49 TONER BK/C/M/Y
<b>Toner (Estimated Yield @ 5% Coverage)</b>	C-EXV 49 TONER BK: 36,000 pages C-EXV 49 TONER C/M/Y: 19,000 pages

## SOFTWARE AND PRINTER MANAGEMENT

<b>Tracking and reporting</b>	For detailed information please visit our website <a href="https://www.canon-europe.com/business/uniFLOW Online Express">https://www.canon-europe.com/business/uniFLOW Online Express</a> Universal Login Manager (ULM) <a href="#">uniFLOW Online Express</a> <sup>1</sup> <sup>1</sup> For more information, please refer to uniFLOW Online Express/uniFLOW Online Technical Datasheets
<b>Remote management tools</b>	iW Management Console eMaintenance Content Delivery System
<b>Scanning software</b>	Network ScanGear
<b>Optimisation tools</b>	Canon Driver Configuration Tool NetSpot Device Installer
<b>Platform</b>	MEAP (Multifunction Embedded Application Platform)
<b>Document Administration</b>	Kofax Power PDF

## PAPER SUPPLY OPTIONS

<b>Cassette Feeding Unit-API</b>	Paper Capacity: 550 sheets x 2 (1,100 sheets) (80 gsm) Paper Type: Thin, Plain, Recycled, Color, Heavy, Bond, Transparency, Pre-punched Paper Size: A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom Size: 105.0 mm to 304.8 x 457.2 mm Paper Weight: 52 to 220 gsm Power Source: From the Main Unit Dimensions (W x D x H): 565 x 615 x 248 mm Weight: Approx. 16.0 kg
----------------------------------	---



# TECHNICAL SPECIFICATIONS

# imageRUNNER ADVANCE DX C3700 Series

## OUTPUT OPTIONS\*

### Copy Tray-J2

\*Paper capacity may vary with different paper type/sizes.

Capacity: 100 sheets (80 gsm)  
Dimensions (W x D x H): 444 x 373 x 176 mm (attached to the main unit, when the extension tray is extended)

### Inner 2way Tray-J1

Tray Capacity (with 80 gsm paper)  
Upper tray: SRA3, A3, A4, A4R, A5, A5R, A6R, B4, B5, B5R, Custom size (98.4 x 139.7 mm to 320.0 x 457.2 mm): 100 sheets  
Lower tray: A4, A5, A5R, A6R, B5, B5R: up to 250 sheets  
SRA3, A3, A4R, B4, Custom Size (98.4x139.7 to 320.0x457.2 mm ): 100 sheets  
Paper Weight: 52 to 300 gsm  
Dimensions (W x D x H): 426 x 407 x 76 mm  
Weight: 0.7 kg

### Inner Finisher-K1

Tray Capacity (with 80gsm paper):  
Upper Tray: A4, A5, A5R, B5: 100 sheets  
SRA3, A3, A4R, A6R, B4, B5R: 50 sheets  
Lower Tray: A4, A5, A5R, B5: 500 sheets  
SRA3, A3, A4R, B4, B5R: 250 sheets  
A6R: 30 sheets  
Paper Weight: 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity :  
A4/B5: 50 sheets (52 to 90 gsm)  
A3/A4R/B4: 30 sheets (52 to 90 gsm)  
Eco Staple:  
A3/A4/B4/B5: 5 sheets (52 to 64 gsm)  
4 sheets (65 to 81.4 gsm)  
3 sheets (81.5 to 105 gsm)  
Staple On Demand: approx. 40 sheets (80 gsm)  
Power supply: From the main unit  
Dimensions (W x D x H): 634 x 525 x 188 mm  
(when the extension tray is extended)  
Weight: Approx. 8.0 kg

### Staple Finisher-AA1

Tray Capacity (with 80gsm paper):  
Upper Tray: A4, A5, A5R, A6R, B5: 250 sheets  
SRA3, A3, A4R, B4, B5R: 125 sheets  
Lower Tray: A4, A5, A5R, B5: 3,000 sheets  
SRA3, A3, A4R, B4, B5R: 1,500 sheets  
A6R: 250 sheets  
Envelope: Monarch 30 sheets, COM10 No.10, DL, ISO-C5: 100 sheets  
Paper Weight:  
Upper Tray: 52 to 256 gsm  
Lower Tray: 52 to 300 gsm  
Staple Position: Corner, Double  
Staple Capacity: A4/B5: 50 sheets (52 to 90 gsm)  
A3/A4R/B4: 30 sheets (52 to 90 gsm)  
Eco Staple:  
A3/A4: 5 sheets (52 to 64 gsm)  
4 sheets (65 to 81.4 gsm)  
3 sheets (82 to 105 gsm)  
Staple On Demand: 50 sheets  
Power supply: From the main unit  
Dimensions (W x D x H): 637 x 623 x 1,016 mm  
(when the extension tray is extended)  
Weight: Approx. 30.0 kg

### Booklet Finisher-AA1

(Includes the above Staple Finisher-AA1 basic staple specifications.)  
Saddle Stitch paper size: A3, A4R, B4  
Saddle Stitch Staple Capacity: 20 sheets x 10 sets (52 to 81.4 gsm)  
(including 1 cover sheet up to 256gsm)  
Non Staple Folded Bunch Capacity: up to 3 sheets (52 to 105 gsm)  
Power supply: From main unit  
Dimensions (W x D x H): 637 x 623 x 1016 mm  
(when the extension tray is extended)  
Weight: Approx. 53.0 kg

### 2/4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1)  
Two or Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size:  
Two holes A3, A4, A4R, A5, B4, B5, B5R, Four holes A3, A4  
Power Source: From the Finisher

### 4 Hole Puncher Unit-A1

(Requires either the Staple Finisher-AA1 or Booklet Finisher-AA1)  
Four Holes  
Acceptable Punch Paper Weight: 52 to 300 gsm  
Acceptable Punch Paper Size: Four holes A3, A4, A4R, A5, B4, B5, B5R  
Power Source: From the Finisher

## HARDWARE ACCESSORIES

### Card Readers

Various card readers available e.g. MiCard Plus.  
Please contact local Canon Office for more details.  
Copy Card Reader-F1  
Copy Card Reader Attachment-B7

### Others

Utility Tray-B1  
Numeric Keypad-A1  
Platen Cover-Y2

## SECURITY OPTIONS

### Data Security

2.5inch/1TB HDD-P1

## SYSTEM AND CONTROLLER OPTIONS

### Print Accessories

PCL International Font Set-A

### Barcode Printing

Barcode Printing Kit-D1

### System Accessories

Copy Control Interface Kit-A1  
Serial Interface Kit-K3  
Connection Kit-A2 for Bluetooth LE  
NFC Kit-E1

### Fax Accessories

Super G3 FAX Board-AZ1  
Super G3 2nd Line Fax Board-AU1  
Remote Fax Kit-A1  
IP FAX Expansion Kit-B1

## OTHER OPTIONS

### Accessibility Accessories

ADF Access Handle-A1  
Voice Guidance Kit-G1  
Voice Operation Kit-D1

### Staple Cartridge

Staple-P1  
Staple Cartridge-Y1

## Software & Solutions



## Certifications and compatibility



Canon Inc.  
canon.com

Canon Europe  
canon-europe.com

English edition  
© Canon Europa N.V., 2020