

imagePROGRAF GP-2600S / GP-4600S / GP-6600S



GP Series

Canon

PANTONE COVERAGE WITH NEW FORMULATED INK

The new GP series has achieved 96% coverage¹ in Pantone's widely used PANTONE™² FORMULA GUIDE. This Solid Coated colour book is widely used in the industry, thanks to its high colour reproducibility. This also supports the printing of product advertisements and corporate colours.

¹ When using Canon Premium Semi-glossy Paper 2 280 with imagePROGRAF printer driver at [High] for Print Quality and [Off] for Colour Correction.

² PANTONE™ is a trademark or registered trademark of Pantone LLC.

GP-6600S (60 inch)



GP-4600S (44 inch)



GP-2600S (24 inch)



KEY FEATURES



REFORMULATED LUCIA PRO II INK

LUCIA PRO II Ink helps to achieve Improved high Black Density, High Scratch resistance and high light resistance for long-term preservation of prints.



INTELLIGENT MEDIA HANDLING

With automatic media handling, simply load the media and let your printer do paper feeding, media type and length detection for you. There is also an optional roll unit that can accommodate an additional roll for a total of two rolls on the printer and can function as a take-up device that automatically takes up the printed roll paper.



COLOUR CALIBRATION

The ability to calibrate the printer for consistent colour, this helps ensure the output is colour consistent over time and across multiple devices.



EASE OF USE

Easily see ink tanks and loaded media through translucent covers. Interior LED light helps previewing while printing. Hot Swap ink helps replacing inks while printing.


POWERFUL POSTER SOLUTIONS

PosterArtist

PosterArtist is a design software and is ideal for anyone that wants to create posters, flyers and banners quickly and easily - no design skills required. The web version of PosterArtist guides you through poster design from start to finish and provides a wide range of templates and stock photos that can be used and edited.

Features include:

- Millions of stock photos are available
- Auto design function provides design ideas that the user then uses and builds on
- Gold/Silver like texture enhances creativity

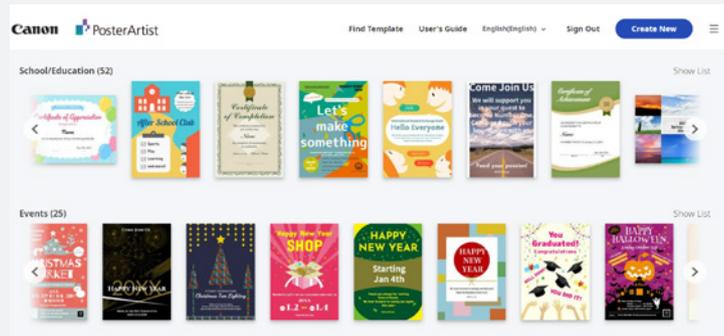

FREE LAYOUTS PLUS

Lets you nest, tile and create custom layouts before printing your files

ACCOUNTING MANAGER

Helps track actual ink and media usage and cost



Canon

imagePROGRAF GP-2600S / GP-4600S / GP-6600S

SPECIFICATIONS

Print Head
PF-10

Number of Nozzles
18,432 Nozzles

Droplet Size
Minimum 4pL per color

Ink Type
Pigment: 7 colours(Matte Black/Photo Black/Cyan/Magenta/Yellow/Grey/Orange)

Ink Tank
Shipped with Printer: GP-2600S : 160ml for PBK/GY and 330ml for other 5 colours
GP-4600S/PRO-6600S : 330ml x 7 colours

Replacement: PFI-3100 (160ml)/ PFI-3300 (330ml)/ PFI-3700 (700ml) for PBK/C/M/Y/GY
PFI-2100 (160ml)/ PFI-2300 (330ml)/ PFI-2700 (700ml) for MBK, O

Printer RAM 3 GB

Hard Disk 500GB (Encrypted)

Media Feed
Media Feed: 1 Roll, Front-loading, Front output>(*Option for 2nd roll)
Cut Sheet: Front-loading, Front Output (manual)

Media Width

Roll Paper	GP-2600S	GP-4600S	GP-6600S
ISO	A4, A3, A3+, A2, A2+, A1	A4, A3, A3+, A2, A2+, A1, A0	A4, A3, A3+, A2, A2+, A1, A0
JIS	B4, B3, B2	B4, B3, B2, B1, B0,	B4, B3, B2, B1, B0,
ARCH	12", 18", 24"	12", 18", 24", 30", 36"	12", 18", 24", 30", 36"
Other	6",8", 10", 12", 14", 15", 16", 17", 18", 20", 22", 24" 300mm, 500mm, 600m	6",8", 10", 12", 14", 15", 16", 17", 18", 20", 22", 24", 30", 34", 36", 42", 44" 300mm, 500mm, 600mm, 800mm, 1000mm	6",8", 10", 12", 14", 15", 16", 17", 18", 20", 22", 24", 30", 34", 36", 42", 44", 50", 54", 60", 300mm, 500mm, 600mm, 800mm, 1000mm

Cut Sheet	GP-2600S	GP-4600S	GP-6600S
ISO	A4, A3, A3+, A2, A2+, A1 B4, B3, B2	A4, A3, A3+, A2, A2+, A1, A0, B4, B3, B2, B1, B0	A4, A3, A3+, A2, A2+, A1, A0 B4, B3, B2, B1, B0
DIN	C4, C3, C2	C4, C3, C2, C1, C0	C4, C3, C2, C1, C0
JIS	B5, B4, B3, B2	B5, B4, B3, B2, B1, B0	B5, B4, B3, B2, B1, B0
ANSI	8.5 x 11", 8.5 x 14", 11 x 17", 13 x 19", 17 x 22", 22 x 34"	8.5 x 11", 8.5 x 14", 11 x 17", 13 x 19", 17 x 22", 22 x 34", 28 x 40, 34 x 44"	8.5 x 11", 8.5 x 14", 11 x 17", 13 x 19", 17 x 22", 22 x 34", 28 x 40, 34 x 44"
ARCH	9 x 12", 12 x 18", 18 x 24", 24 x 36"	9 x 12", 12 x 18", 18 x 24", 24 x 36", 26 x 38", 27 x 39", 30 x 42", 36 x 48"	9 x 12", 12 x 18", 18 x 24", 24 x 36", 26 x 38", 27 x 39", 30 x 42", 36 x 48"
Photo	(20 x 24"), (18 x 22"), (14 x 17"), (12 x 16"), (10 x 12"), (10 x 15"), (8 x 10"), (16 x 20")	(20 x 24"), (18 x 22"), (14 x 17"), (12 x 16"), (10 x 12"), (10 x 15"), (8 x 10"), (16 x 20")	(20 x 24"), (18 x 22"), (14 x 17"), (12 x 16"), (10 x 12"), (10 x 15"), (8 x 10"), (16 x 20")
Poster	20 x 30", 300x900mm	20 x 30", 30 x 40", 42 x 60", 44 x 62", 300x900mm	20 x 30", 30 x 40", 42 x 60", 44 x 62", 50x70", 54x76", 60x84", 300x900mm
Others	13x22"	13x22"	13x22"

Media Cutter
Automatic horizontal cutting (Rotary Cutter)

Media Thickness
0.07 – 0.8 mm

Media Core Sizes
2" or 3" Core

Wireless printing requires a working network with wireless 802.11b/g or 802.11n capability. Wireless performance may vary based on terrain and distance between the printer and wireless network clients.

The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times will depend on the host system performance.

Quoted top speeds may be limited by the effective bandwidth of the USB 2 and is not guaranteed for all media types.

The quoted scan accuracy may vary depending on the operating environment and the thickness of the media.

Maximum Roll Outer Diameter
170mm or less

Printing Software Utilities
Accounting Manager, Canon Print Service, Device Management Console, Professional Print & Layout, Direct Print Plus, Free Layout Plus, Printer Driver for Windows®/ Mac®, Media Configuration Tool, Canon PRINT, PosterArtist Web, PIXMA Cloud Link

Operating System
Windows 7 (32/64-bit), Windows 8.1 (32/64-bit), Windows 10 (32/64-bit), Windows 11, Windows Server 2008 R2, (32/64-bit), Windows Server 2012 (64-bit), Windows Server 2012 R2 (64-bit), Windows Server 2016 (64-bit), Macintosh OS v10.10.5-v12x, Windows Server 2019 x64, Windows Server 2022

Print Language
SGRaster, PDF, JPEG

Interface
Hi-Speed USB : Full Speed (12 Mbit/sec), High Speed (480 Mbit/sec), Bulk transfer
Ethernet(Built in) : IEEE802.3ab(100BASE-T)/IEEE802.3u(100BASE-TX)/IEEE802.3(10BASE-T)
Wireless LAN : IEEE 802.11 b/g /n

Power Supply
AC 100–240V (50 – 60 Hz)

Power Consumption

Power Consumption	GP-2600S	GP-4600S	GP-6600S
ISO Power Consumption (using wired LAN)	Approx 85W	Approx 85W	Approx 85W
Standby(using wired LAN)	Approx 1.7W	Approx 1.7W	Approx 1.7W
Power Off	Approx 0.1W	Approx 0.1W	Approx 0.1W

Operational Environment

Temperature: 15° – 30° C
Relative Humidity: 10-80%
(Non Condensation)

Printer Dimensions (W x D x H) and Weight

Printer Dimensions	GP-2600S	GP-4600S	GP-6600S
Dimensions with stand basket opened (W x D x H)	1110 x 984 x 1168mm	1593 x 984 x 1168mm	1999 x 984 x 1168mm
Weight (with Stand)	100kg	122kg	169kg

Package Dimensions (W x D x H) and Weight

Package Dimensions	GP-2600S	GP-4600S	GP-6600S
Printer with Stand Package Dimensions (W x D x H) with pallet	1338 x 912 x 1139mm	1820 x 915 x 1042 mm	2227 x 915 x 1025mm
Printer with Stand Package Weight	153kg	181kg	218kg

Options

Options	GP-2600S	GP-4600S	GP-6600S
Roll Unit	RU-23	RU-43	RU-63
Roll Holder	RH2-29	RH2-46	RH2-66

Consumables

Ink Tank: PFI-2100/PFI-2300/PFI-2700 for MBK,
PFI-3100/PFI-3300/PFI-3700 for other colours

Maintenance Cartridge: MC-30

Cutter Blade: CT-07



Canon Australia Pty Ltd
1800 444 199
canon.com.au/business



Canon New Zealand Ltd
0800 222 666
canon.co.nz/business